



The Proflow dynamic 1600 series valves can also be pre-set by referencing the design flow rate against a flow diagram.


1600 PICV - DN15 (LF)

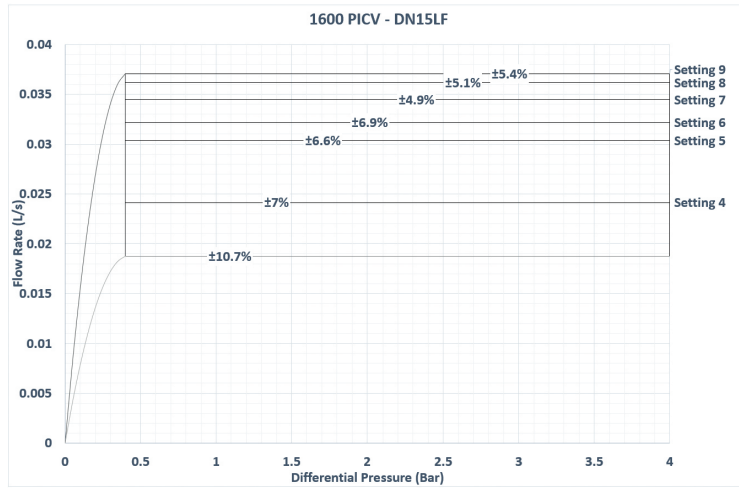


1600 PICV - DN15 (SF)

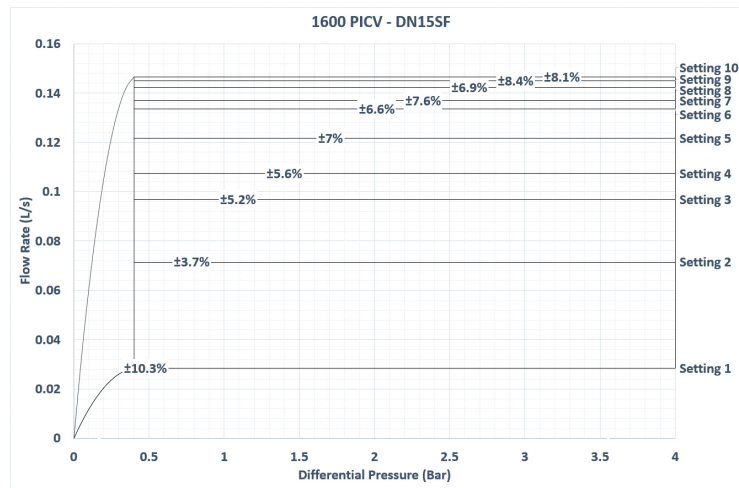


1600 PICV - DN15 (HF)

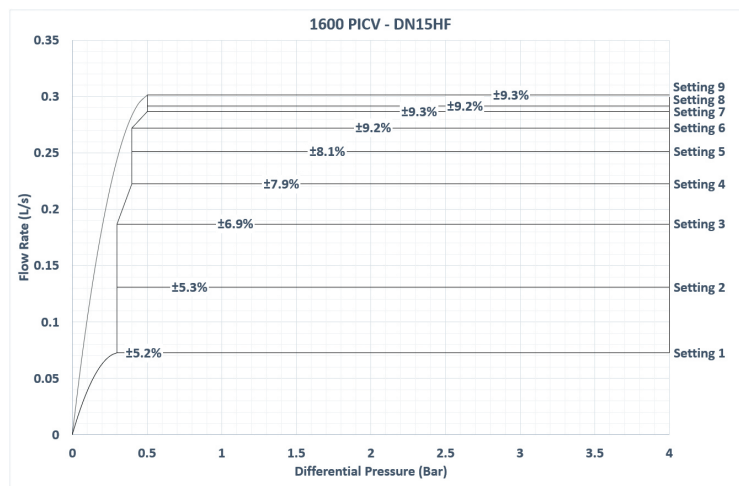


1600 PICV - DN20 (SF)

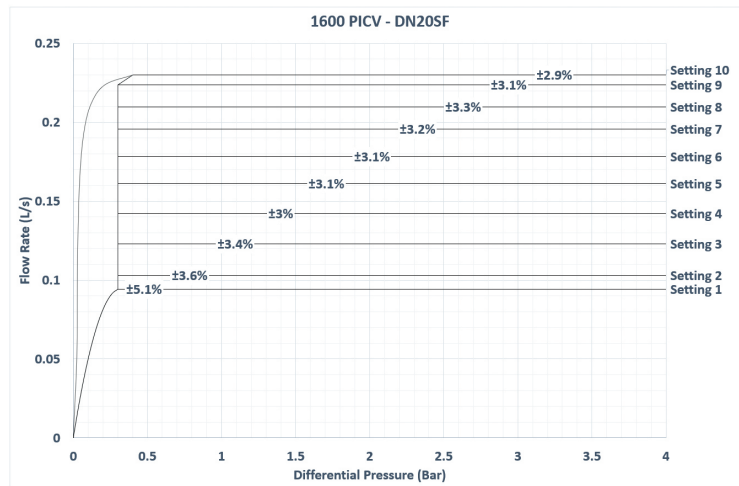

1600 PICV - DN20 (HF)

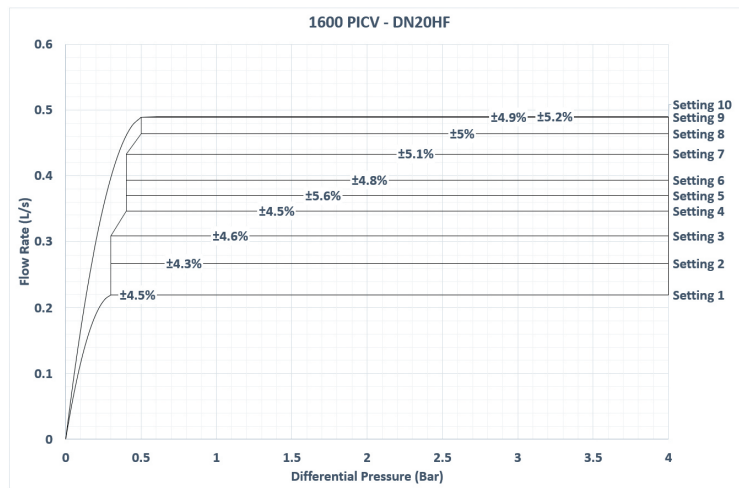

1600 PICV - DN25 (SF)

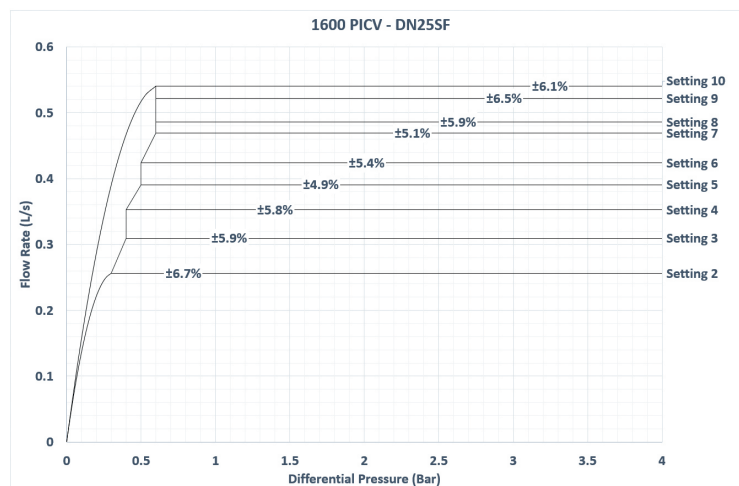

Confirmation of the flow rate can also be gained by connecting an electronic commissioning meter or flow meter via the built in test points.